

TATA MOTORS PICKUPS YODHA

UNMATCHED COMFORT & PERFORMANCE FOR YOUR BUSINESS

No road is impossible



YODHA

KEY FEATURES



POWERFUL PERFORMANCE
WITH 100 hp @3 750 r/min,
250 Nm TORQUE



STURDY 3-PIECE METALLIC BUMPER
FOR EASE OF REPAIRS AND SERVICEABILITY




210 mm GROUND CLEARANCE FOR SAFETY
AND EASY NAVIGATION ON ROUGH TERRAIN



FLAT LAYDOWN RECLINER SEATS WITH HEADREST
AND HVAC (HEATING VENTILATION
AND AIR CONDITIONING)/ BLOWER VARIANT*



3 YEAR/ 3 LAKH km WARRANTY,
MAINTENANCE FREE AGGREGATES FOR LIFE

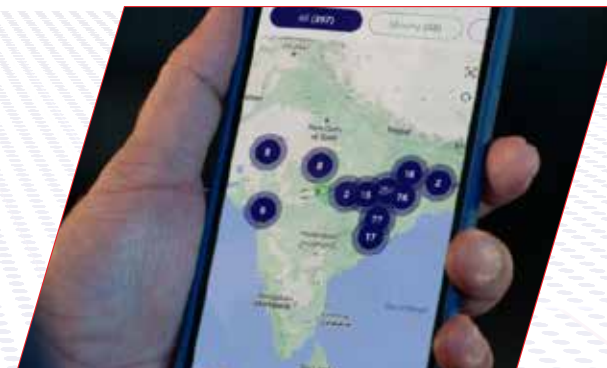

FLEET EDGE ENABLED - GPS, FUEL EFFICIENCY,
DRIVER NOTIFICATIONS

YODHA 2.0

*Prepare to conquer any terrain
with our powerful pickup,
featuring SUV-like comfort
and power in a truck
with 2 000 kg payload.*



2 TON PAYLOAD



30% GRADEABILITY



ECO-SWITCH



3 300 mm LONG WHEELBASE

YODHA EX

Get ready to boost your business with a powerful pickup built with advanced features and independent coil suspension designed for comfort and performance.



40% GRADEABILITY



INDEPENDENT COIL
SPRING SUSPENSION



TILT ADJUSTABLE STEERING



3 300 mm LONG WHEELBASE

YODHA

4X4

*Experience unmatched versatility
with features designed for
off roading capabilities with
superior gradability and
ground clearance.*



62 % GRADEABILITY



HYDRAULIC CLUTCHPLATE




2 317 mm (7.6 ft.) x 1 793 mm (5.9 ft.)
BIG LOADING AREA




GROUND CLEARANCE - 210 MM

YODHA 1700

A sturdy pickup truck engineered with a robust build, 16" big tyres enhances stability in high load condition and high speed operation.

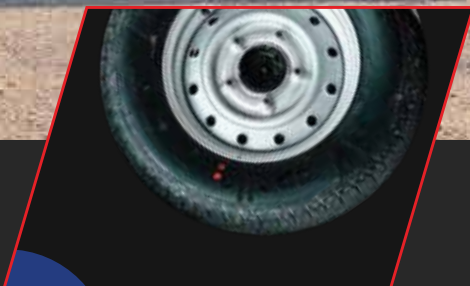

16" BIG TYRE

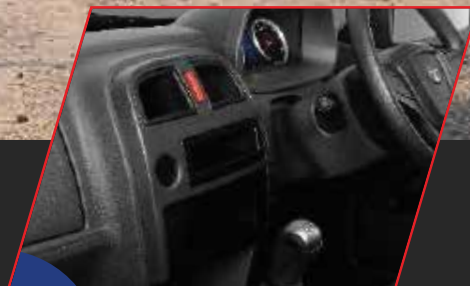

HEATING, VENTILATION,
AND AIR CONDITIONING OPTIONAL



3 300 mm LONG WHEELBASE



FLEET EDGE ENABLED

	YODHA 2000	YODHA 1700	YODHA 4X4	YODHA EX
Engine type	TATA 2.2L VARICOR Intercooled Turbocharged BS6 DI engine			
Max engine output	74.8 kW (100 hp) @ 3 750 r/min			
Max engine Torque	250 Nm@1 000 - 2 500 r/min			
Fuel tank capacity	52L Polymer Tank			
Clutch	Single Plate dry Friction type 260 mm Dia			
Gearbox	G76-5/4.49 mark 2, Synchromesh 5F+1R			
Steering	Power Steering			
Front suspension	Rigid suspension with semi-elliptical leaf springs - 6 leaves		Rigid suspension with semi-elliptical leaf springs - 5 leaves	Double wishbone type independent coil spring
Rear suspension	Innovative Two stage Semi-elliptical leaf springs - 9 leaves		Rigid suspension with semi-elliptical leaf springs - 7 leaves	Parabolic leaf springs
Anti Roll Bar	Front			
Front brakes	Hydraulic, twin pot Disc Brake			
Rear brakes	Drum Brake			
Tyre	215/75 R 16 Radial		215/75 R15	215/75 R 16 Radial
Rim size	16 inch		15 inch	16 inch
External Load body	2 650 mm (8.7 ft.) x 1 850 mm (6 ft.)		2 317mm (7.6 ft.) x 1 793mm (5.9 ft.)	2 650 mm (8.7 ft.) x 1 850 mm (6 ft.)
Turning Circle Radius	6 250 mm			
Ground Clearance (mm)	210 mm			
Air conditioning (HVAC)	NA	Optional	NA	Optional
Dimensions				
Wheel Base (mm)	3 300		2 975	3 300
Width (mm)	1 860		1 860	1 860
Length (mm)	5 350		5 005	5 350
Height (mm)	1 810		1 810	1 810
Weights				
GVW (kg)	3 840	3 490	2 990	2 990
Kerb weight (kg)	1 840	1 790	1 780	1 760
Payload (kg)	2 000	1 700	1 210	1 230
Performance				
Gradability	30%	34%	62%	40%
Seating Capacity	D+1			
Engine Oil change interval	20 000 km			
Warranty (On Driveline)	3 Years/3 Lakh km			